


Explosion protection:	II3G Ex ec IIC T6÷T5 Gc II3D Ex tc IIIC T90°C÷T70°C Dc
Ingress protection:	IP66
EC Type certificate:	TÜV CY 21 ATEX 0206415 X
Ambient temp.:	-25°C ÷ +40°C -25°C ÷ +50°C/+60°C on demand
Body:	Glassfibre reinforced Polyester
Diffuser:	UV resistant polycarbonate
Light source:	LED 120° 4.000 K
Lifetime:	50.000 hours
Power supply:	230Vac 50/60Hz ±10% 24V.. 110Vac/dc on demand
Cable entries:	1 cable gland M20 7-13mm 2nd cable gland on demand



SELECTION CHART & DIMENSIONS

FIG A

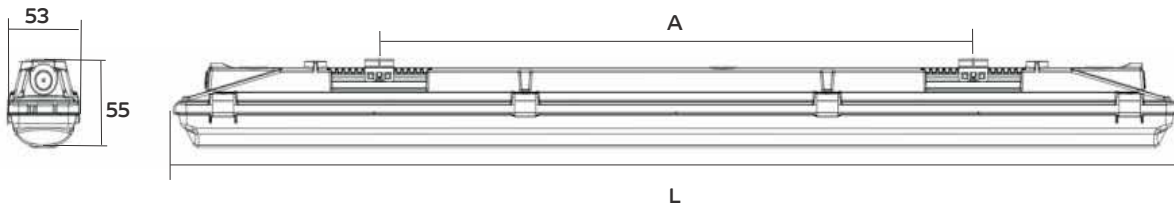

Article code	Power [Watt]	Luminous Flux [Lm]	< L > [mm]	< A > [mm]	Weight [Kg]
SVN 36	36	4.000	1.185	700	1.5
SVN 50	50	7.200	1.480	1.000	2.2
SVN 60	60	8.400	1.480	1.000	2.5
SVN 75	75	11.000	1.580	1.100	3.3